NEXXT WASHER SPECIFICATIONS

NEXXT™ WASHER CONTROL PANEL*

The easy-to-use, ergonomic design of the Nexxt Washer Control Panel gives you immediate access to 15 different washing programs. For instance, the Quick Mix custom wash can safely and quickly clean lightly soiled and mixed fabrics.

NEXXT™ PREMIUM WASHER CONTROL PANEL*

Wash selection is made simple with the extra-large LCD panel on the Nexxt Premium Washer Control Panel. It displays cycle information clearly and easily with simple, graphical descriptions while blending smoothly into the clean, ergonomic styling Bosch is known for.

* All models 100% quality tested.

MODEL NUMBER	WFMC6400UC Nexxt™ Premium Washer	WFMC3200UC Nexxt Washer
FEATURES		
High Efficiency Archie™ Paddles with 3-D Tumble Action Wash	■	■
Stainless Steel Incline Drum	■	■
Bosch Detergent Efficiency System with 3 Dispenser Chambers	■	■
Bosch Sensotronic Plus™ (Dynamic Load Sensor, Digital Temperature Sensor, Suds Sensor, Unbalance Sensor)		■
Bosch Sensotronic II Plus™ (Dynamic Load Sensor, Digital Temperature Sensor, Continuous Suds Sensor, Unbalance Sensor)	■	
WASHING PROGRAMS	15	15
Regular/Cotton – Cold, Warm, Hot, Temperature Boost	■	■
Permanent Press – Cold, Warm, Hot	■	■
Delicates Cycle	■	■
Hand Washables Cycle	■	■
Wool Cycle	■	■
Active Wear Cycle	■	■
Quick Mix Cycle		■
Sanitary Cycle	■	
Rinse Cycles	Up to 5	Up to 5
OPTIONAL SETTINGS		
Display	LCD	LED
Spin Speed Selection	Up to 1,200	Up to 1,000
Clock	■	
Bleach	■	■
Rinse Plus	■	■
Power Wash	■	■
Pre-Soak	■	
Quick Wash	■	
Child Lock-Out Function	■	
Adjustable End-of-Cycle Signal	■	
Reduced Ironing/Interval Spin	■	
Real Time Finish	■	
Real Time Delay	■	
Delayed Start	24 hours with 30 minute increments	19 hours with 1 hour increments
Interactive Language Display (English, Spanish & French)	■	
DESIGN ELEMENTS		
Ergonomically Correct Front Panel	■	■
Tactile Feedback (Electronic) Controls	■	■
Asynchronous Brushless Motor	■	■
Glass Bullseye Door	■	■
180° Angle Door Opening	■	■
Magnetic Door Lock for Reload Option	■	■
Non-Reversible Door Hinged on Left	■	■
Finish	White	White
ACCESSORIES		
8" Pedestal for Washer & Dryer (Purchased Separately)	■	■
CAPACITY		
Net Weight (lbs.)	216	216
Drum Capacity (lbs.)	18	18

WFMC6400UC
Nexxt Premium Washer

WFMC3200UC
Nexxt Washer

(Both washers shown with accessory pedestal WTZ1295.)



Washer and Dryer Warranty Information: BSH warrants that its laundry products are free from defects in materials and workmanship for a period of 1 year for labor; 2 years for parts; 2 years on stainless steel drum and all electronic components including motor (parts only). Certain limitations apply. See Manufacturer's Limited Warranty for details. Warranty only applies to manufacturer's defective merchandise and does not cover third-party damages to the product, including, without limitation, damages incurred in shipping, installation, servicing or through consumer abuse or negligence. This warranty is the sole and exclusive remedy for any defective product. Manufacturer's only obligation is to repair defective product or parts thereof; manufacturer has no obligation to replace product that is capable of being repaired.

NEXXT DRYER SPECIFICATIONS

NEXXT™ DRYER CONTROL PANEL*

With 11 different drying programs to choose from, displayed on a clean, easy-to-use panel, Nexxt ensures every garment is handled with utmost care. An LED screen counts down the remaining drying time while cycle information is available at just a glance with our distinct dial.

NEXXT™ PREMIUM DRYER CONTROL PANEL*

15 drying programs are quickly and easily available when you use the Nexxt Premium Dryer Control Panel with graphical LCD display. Choose between cycles for Wool Care, Air Fluff, Heavy Load, even Extra Care for clothing that deserves to be treated beyond delicate.

* All models 100% quality tested.

MODEL NUMBER	WTMC6500UC Nexxt™ Premium Gas Dryer	WTMC6300US/CN Nexxt Premium Electric Dryer	WTMC3300US/CN Nexxt Electric Dryer
FEATURES			
Synchro Technology Operation Logic for Washer & Dryer	■	■	■
Bosch Duotronic™ with Moisture & Temperature Sensors	■	■	■
Stainless Steel Drum	■	■	■
3 Asymmetric Paddles	■	■	■
Humidity Controlled Drying Process	■	■	■
Baffle System	■	■	■
Insulation System	■	■	■
DRYING PROGRAMS	15	15	11
Timed Drying (10–60 min.)	■	■	■
Air Fluff (10–90 min.)	■	■	■
Regular Cycle	4	4	4
Permanent Press Cycle	3	3	3
Heavy Load Cycle	■	■	
Wool Care Cycle	■	■	
Short Cycle	■	■	
OPTIONAL SETTINGS			
Display	LCD	LCD	LED
Spin Speed	■	■	
Clock	■	■	
Sequence Indicator (3-Digit Display)	■	■	■
Delicates	■	■	■
Extra Care	■	■	
Child Lock-Out Function	■	■	
End-of-Cycle Signal	■	■	■
Sun Symbol (Fine-Tuning Drying Results)	■	■	
Time Remaining Display	■	■	
Wrinkle Block™ (1 hr.)			■
Extended Wrinkle Block™ (3 hr.)	■	■	
Damp Dry Signal	■	■	
Lint Filter Indicator	■	■	■
DESIGN ELEMENTS			
Door Lock with Automatic Circuit Break	■	■	■
Interior Drum Light	■	■	■
Venting in Back	■	■	■
Extra-Fine, Easy-to-Clean Lint Filter	■	■	■
Tactile Feedback (Electronic) Controls	■	■	■
Reversible 180° Door	■	■	■
Klixon Safety Switch (Thermal Cut Off)	■	■	■
Finish	White	White	White
ACCESSORIES			
8" Pedestal for Washer & Dryer (Purchased Separately)	■	■	■
Venting Kit for Bottom or Right Side (Purchased Separately)	■	■	■
Dryer Rack for Shoes & Delicates (Purchased Separately)	Included	Included	■
Liquid Propane Convertible (Purchased Separately)	■		
CAPACITY			
Net Weight (lbs.)	125	125	125
Drum Capacity (lbs.)	18	18	18

WTMC6500UC
Nexxt Premium Gas Dryer

WTMC6300US/CN
Nexxt Premium Electric Dryer

WTMC3300US/CN
Nexxt Electric Dryer

(All dryers shown with accessory pedestal WTZ1295.)



Washer and Dryer Warranty Information: BSH warrants that its laundry products are free from defects in materials and workmanship for a period of 1 year for labor; 2 years for parts; 2 years on stainless steel drum and all electronic components including motor (parts only).

AXXIS WASHER SPECIFICATIONS

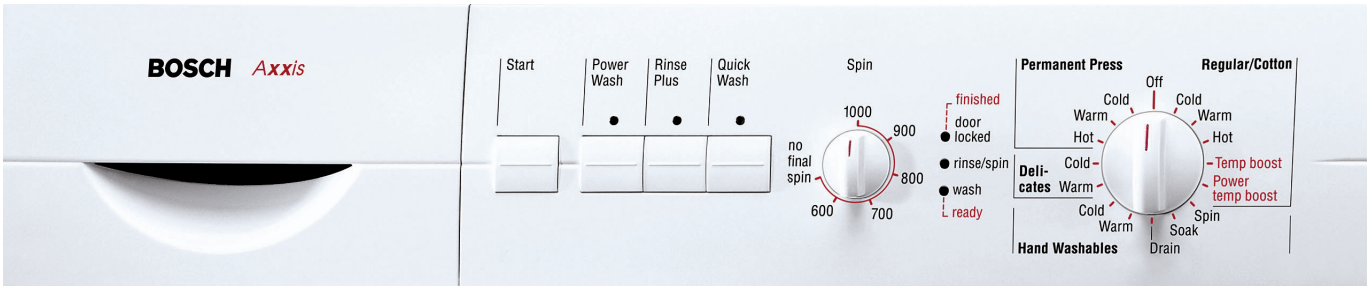

AXXIS™ WASHER CONTROL PANEL

High Efficiency Tumble Action Wash System • Logixx Controls • 1,000 rpm • Bosch Sensotronic Plus™ (Load Sensor, Digital Temperature Sensor, Suds Sensor, Unbalance Sensor) • 5 Guaranteed Wash Temperatures (up to 161°F).

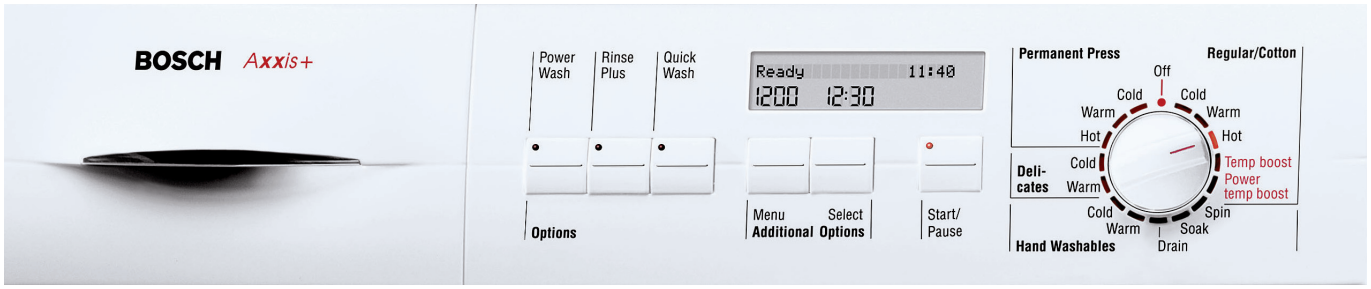

AXXIS+™ WASHER CONTROL PANEL

High Efficiency Tumble Action Wash System • Logixx™ Controls • 1,200 rpm • Bosch Sensotronic II Plus™ (Dynamic Load Sensor, Digital Temperature Sensor, Continuous Suds Sensor, Unbalance Sensor) • 6 Guaranteed Wash Temperatures (up to 161°F) • Real Time Finish & Delay • Adjustable End-of-Cycle Signal • Child Lock-Out Function.

MODEL NUMBER	WFR2460UC Axxis+™ Washer	WFL2060UC Axxis Washer
FEATURES		
High Efficiency Tumble Action Wash System	■	■
Stainless Steel Drum	■	■
Logixx™ Controls	■	■
Internal Heating Element	■	■
5 Guaranteed Wash Temperatures (up to 161°F)		■
6 Guaranteed Wash Temperatures (up to 161°F)	■	
Bosch Sensotronic Plus™ (Load Sensor, Digital Temperature Sensor, Suds Sensor, Unbalance Sensor)		■
Bosch Sensotronic II Plus™ (Dynamic Load Sensor, Digital Temperature Sensor, Continuous Suds Sensor, Unbalance Sensor)	■	
Three Tier Fill System	■	■
Bosch Detergent Efficiency System	■	■
WASHING PROGRAMS		
Regular/Cotton Cycle	■	■
Permanent Press Cycle	■	■
Delicates Cycle	■	■
Hand Washables Cycle	■	■
OPTIONAL SETTINGS		
Quick Wash Option	■	■
Power Wash Option	■	■
Rinse Plus Option	■	■
2 - 5 Rinses	■	■
Spin Speed Selection	up to 1,200	up to 1,000
Clock	■	
Real Time Finish	■	
Real Time Delay	■	
Reduced Ironing Option	■	
Interactive Language Display (English, Spanish, French & German)	■	
Child Lock-Out Function	■	
Adjustable End-of-Cycle Signal	■	
DESIGN ELEMENTS		
Electronic Controls	■	■
LED Sequence Indicator		■
Continuous Cycle Notification – LCD Display	■	
LED Door Locked Indicator		■
Capacity (lbs.)	13	13
Finish	White	White
ACCESSORIES		
12" Pedestal for Washer and Dryer (white) WTZ1210		
Vertical Stacking Kit with Pull-Out-Tray (white) WTZ1180		

WFR2460UC
Axxis+ Washer

WFL2060UC
Axxis Washer



Dimensions for WFL2060UC (Axxis) and WFR2460UC (Axxis+) Washers
Electrical Requirements:
208/240V, 60Hz, 15A
(If installed with a Bosch dryer, refer to dryer electrical requirements.)

Dimensions:
For planning only. For details, see Installation Manual.
Specifications subject to change without notice.
UL and CUL listed.
Stacked installation height 67" (with WTZ1180: 68 9/16").

CHANGE FOR THE BETTER WITH ENERGY STAR

c UL us LISTED

Warranty Information: 1 year parts and labor; 2 years parts; 5 years on all electronic components (parts only); 5 years on motor/pump (parts only); 5 years against rust-through of cabinet (parts only); lifetime warranty against rust-through on stainless steel drums. Certain limitations apply. See Manufacturer's Limited Warranty for details.

AXXIS DRYER SPECIFICATIONS

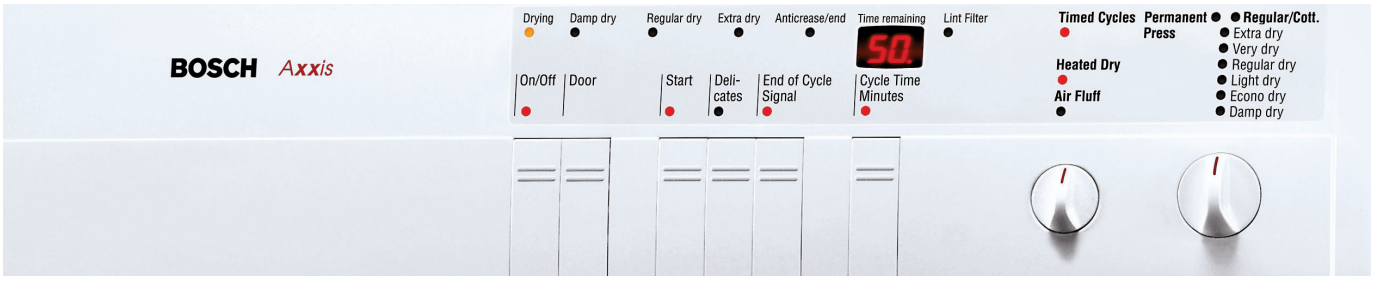

AXXIS™ DRYER CONTROL PANEL (VENTED)

Duotronic™ • Stainless Steel Drum • Reverse Tumble Action • Delicates Option • Anticrease Feature (for 35 min. after cycle).

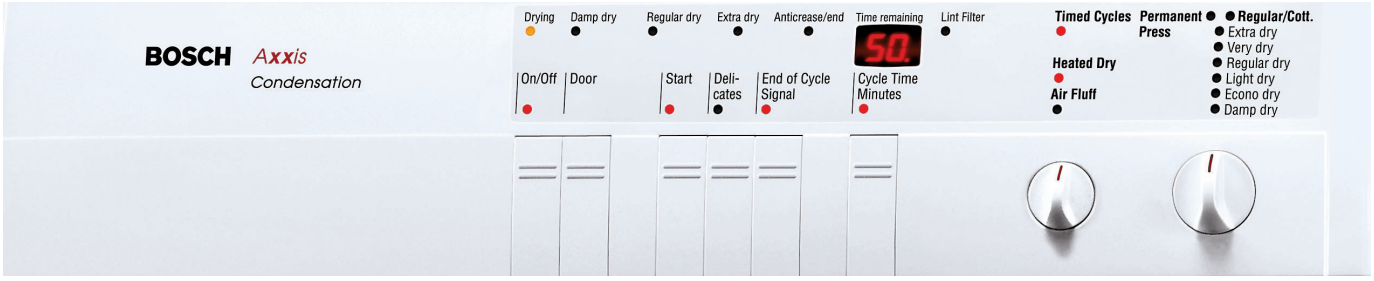

AXXIS™ DRYER CONTROL PANEL (CONDENSATION)

Duotronic™ • Stainless Steel Drum • Reverse Tumble Action • Delicates Option • Anticrease Feature (for 35 min. after cycle) • No Venting Needed.

MODEL NUMBER		WTA3510UC Axxis™ Dryer (Vented)	WTL5410UC Axxis Dryer (Condensation)
FEATURES			
Bosch Duotronic™		■	■
Stainless Steel Drum		■	■
Reverse Tumble Action		■	■
6 Duotronic™ Auto Dry Cycles – Regular/Cotton		■	■
5 Duotronic™ Auto Dry Cycles – Permanent Press		■	■
DRYING PROGRAMS			
Timed Drying (10 – 90 min.)		■	■
Air Fluff (10 – 90 min.)		■	■
Regular/Cotton Cycle		6	6
Permanent Press Cycle		5	5
OPTIONAL SETTINGS			
Delicates Option		■	■
Condensation Drying System			■
Time Remaining Display		■	■
Adjustable End-of-Cycle Signal		■	■
Anticrease Feature (for 35 min. after cycle)		■	■
Lint Filter LED Indicator		■	■
DESIGN ELEMENTS			
Electronic Controls		■	■
LED Sequence Indicator		■	■
Extra-Fine, Easy-to-Clean Lint Filter		■	■
Finish		White	White
ACCESSORIES			
12" Pedestal for Washer and Dryer (white)	WTZ1210		
Vertical Stacking Kit with Pull-Out-Tray (white)	WTZ1180		

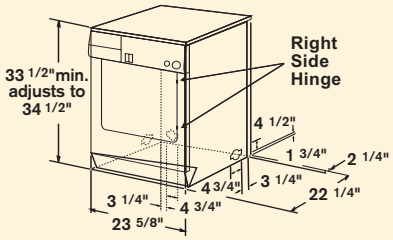

Dimensions for WTA3510UC (vented)
Electrical Requirements:
208/240V, 60Hz, 15A
(Supplied 240V/30A cord for installation with Bosch washing machines.)



Dimensions for WTL5410UC (condensation — no ducting required)
Electrical Requirements:
208/240V, 60Hz, 15A
(Supplied 240V/30A cord for installation with Bosch washing machines.)

Dimensions:
For planning only. For details, see Installation Manual.
Specifications subject to change without notice.
UL and CUL listed.
Stacked installation height 67" (with WTZ1180: 68 9/16").

WTA3510UC
Axxis Dryer
(vented)

WTL5410UC
Axxis Dryer
(condensation)

c UL us LISTED

Warranty Information: 1 year parts and labor; 2 years parts; 5 years on all electronic components (parts only); 5 years on motor/pump (parts only); 5 years against rust-through of cabinet (parts only); lifetime warranty against rust-through on stainless steel drums. Certain limitations apply. See Manufacturer's Limited Warranty for details.